



Aluminium
LADDERS

Catalogue
of products

Aluminijumske **ljestve**
Aluminium **ladders**
Aluminium **leitern**



aluminium ladders

Our products are crafted from high-quality aluminium, and they are fully compliant with European standard EN 131.

We are proud to say that every ladder we offer holds a TÜV GS certificate, ensuring their safety and reliability. STS aluminium ladders are available throughout Europe and beyond, and we provide a statement of origin EUR1 for each one.

MADE IN EUROPE

**INNOVATION, RELIABILITY
AND MORE SOLUTIONS FOR YOU**

Table of Contents

4

Step Ladders

8

DIY Ladders

15

Home DIY Ladders

17

Industrial Ladders

WWW.STSDOO.COM

High quality
Aluminium



TÜV GS
Certificates



www.tuv.com

Wide range of
Products






STEP

Strong Lightness


- Tested for professional use
 - 80 mm deep steps
- Steel safety platform 260x250m with finger protection (step ladder)
 - Slip-resistant foot caps
 - Max load 150 kg
 - Standard EN 131-3
 - TÜV Rheinland Certificated

Step ljestva
Step ladder
Stehleitern



	Barcode	Steps	Width (mm)	Height (mm)	Top Platform Width (mm)	Max. Height (mm)	Weight (kg)
CXT06/03	3871880001541	2+1	420	1250	570	2370	3.0
CXT06/04	3871880001558	3+1	445	1480	790	2590	3.6
CXT06/05	3871880001565	4+1	470	1720	1010	2810	4.2
CXT06/06	3871880001572	5+1	490	1955	1230	3030	5.0
CXT06/07	3871880001589	6+1	520	2190	1460	3260	6.7
CXT06/08	3871880001596	7+1	545	2420	1670	3470	7.1

Dupla step ljestva
Double-sided step ladder
Stufen-Doppelleiter

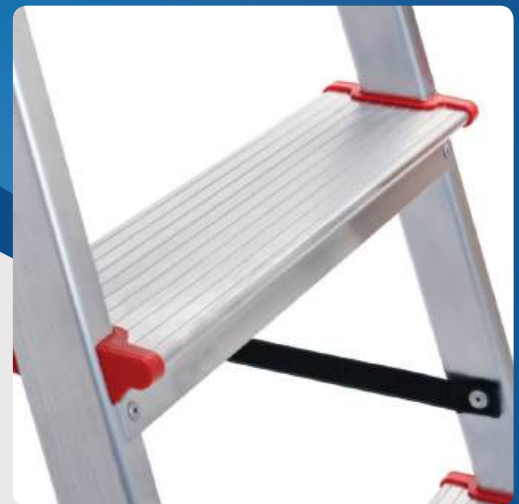

C04CNP/02	3871880001398	2X2	430	485	2000	1.9
C04CNP/03	3871880001404	2X3	650	720	2215	2.6
C04CNP/04	3871880001411	2X4	880	945	2440	3.4
C04CNP/05	3871880001428	2X5	1095	1170	2650	4.5
C04CNP/06	3871880001435	2X6	1285	1405	2860	5.2
C04CNP/07	3871880001442	2X7	1520	1630	3090	6.1




HOME STEP

FOR HOUSEHOLD USE ONLY

BS CLASS 3
STANDARD

125 KG

Step ljestva
Step ladder
Stehleitern



EX125/03

3871880001824

1x3

420

1250

570

2370

2.7

EX125/04

3871880001831

1x4

440

1480

790

2590

3.2

EX125/05

3871880001848

1x5

470

1720

1010

2810

3.8



DIY

Reliable Practicality

- Intended for individual and occasional use
 - Professional use tested
 - 27x27 mm rungs
 - Non-slip foot caps
 - Hooks with auto lock
 - Wide stabilizer bar
 - Max load 150 kg
 - Standard EN 131-3
- TÜV Rheinland Certificated

Ravna ljestva
Single section ladder
Anlegeleiter



Model	Barcode	Width	Height	Height	Height	Weight
B02B/200	3871880000674	1x7	362	1995	2770	2.7
B02B/230	3871880000681	1x8	362	2275	3040	3.3
B02B/250	3871880001497	1x9	362	2547	3290	3.5
B02B/280	3871880000698	1x10	362	2835	3560	4.0
B02B/300	3871880002296	1x11	362	3115	3850	4.5
B02B/330	3871880000704	1x12	362	3387	4080	5.4
B02B/380	3871880000711	1x14	362	3947	4610	6.3
B02B/430	3871880000728	1x16	362	4507	5130	7.3
B02B/480	3871880000733	1x18	362	5067	5660	8.6

2-dijelna kombinovana ljestva
II section combination ladder
Zweiteilige kombileiter





B10B2/170	3871880001534	2x6	460	1707	2255	1615	2515	3020	6.2
B10B2/200	3871880000810	2x7	460	1987	3110	1905	2805	3820	6.9
B10B2/230	3871880000827	2x8	460	2267	3390	2165	3065	4085	8.1
B10B2/250	3871880000834	2x9	460	2547	3950	2420	3320	4610	8.7
B10B2/280	3871880000841	2x10	460	2827	4510	2710	3610	5140	9.5
B10B2/300	3871880000858	2x11	460	3107	5070	2990	3890	5665	12.3
B10B2/330	3871880000865	2x12	460	3387	5630	3230	4130	6190	13.1
B10B2/350	3871880000872	2x13	460	3667	6190	3470	4370	6715	14.2

3-dijelna kombinovana ljestva
III section combination ladder
Dreiteilige kombileiter



Model	Barcode	Sections	Width (cm)	Length (cm)	Height (cm)	Height (cm)	Height (cm)	Height (cm)	Weight (kg)
B10B3/170	3871880001510	3x6	462	1730	3650	2440	4320	3340	9.5
B10B3/200	3871880000889	3x7	462	1995	4240	2945	4880	3845	10.3
B10B3/230	3871880000896	3x8	462	2275	4520	3225	5145	4125	11.5
B10B3/250	3871880000902	3x9	462	2555	5360	3780	5935	4630	13.5
B10B3/280	3871880000919	3x10	462	2835	6210	4300	6470	5200	15.8
B10B3/300	3871880000926	3x11	462	3115	6475	4620	6985	5520	18.3

Zglobna ljestva + platforma
Multipurpose hinged ladder + platform
Regalleitern + Plattform-Set

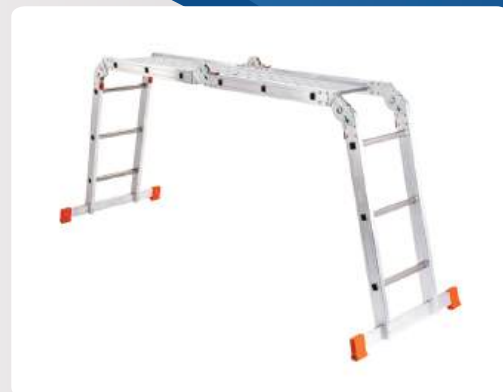

B05ZG/4x3

3871880001299

985

350

975



1720

4240

15.4

Mini skela
Mini scaffolding
Mini-Gerüst

PLATFORM: 1250x495x9mm



B10P26/170

3871880001466

1370

460

2810

3000

13.8

B10P26/200

3871880002418

1370

460


3360

3000

16.3

Mobilna skela
Mobile scaffolding
Stand-Fahrgerüst

 **OPTION: With wheels**



150,0 kg/m²



WATER RESIST

Platform 1400x500x90 mm



B10P50/420

3871880001824

4200

3000

5000

48.0



HOME DIY

Light and Durable

- Intended for home DIY use
 - Rungs 24x24 mm
 - Non-slip foot caps
 - Auto lock hooks
 - Max load 150 kg
 - Standard EN 131-3
- TÜV Rheinland Certificated

Ravna / 2-dijelna / 3-dijelna ljestva
Single / II section / III section ladder
Einteilig / 2-teilige / 3-teilige Leiter



AXXA 1x10

3871880001954

1x10

325

2695

2530

3430

4.0

AXXA 1x12

3871880001961

1x12

770

3255

3060

3960

5.0



AXXA 2x7

3871880002418

2x7

765

1890

2980

3670

6.5

AXXA 2x9

3871880001978

2x9

790

2450

3800

4560

7.5

AXXA 2x11

3871880001985

2x11

910

2990

4880

5330

10.0



AXXA 3x7

3871880001992

3x7

790

1910

4080

4670

9.5

AXXA 3x9

3871880002005

3x9

940

2455

5140

5620

12.0

AXXA 3x11

3871880002012

3x11

985

2990

6230

6550

15.5



INDUSTRIAL

Maximum Durability

- Intended for intensive and daily use
- Industrial high-grade aluminium
- All sides profiled 30x30 mm rungs
 - Large non-slip foot caps
 - Safe use with auto lock hooks
- Max stability with wide stabilizer bar
 - 150 kg max load
 - Standard EN 131-3
 - TÜV Rheinland Certificated

Ravna ljestva
Single section ladder
Anlegeleitern



Model	Product Code	Rungs	Width (mm)	Length (mm)	Height (mm)	Weight (kg)
A02A/200	387188000018	1x7	412	2010	2790	3.5
A02A/250	387188000025	1x9	412	2570	3310	4.3
A02A/300	387188000032	1x11	412	3130	3840	5.5
A02A/350	387188000049	1x12	412	3410	4100	6.9
A02A/400	387188000056	1x14	412	3970	4630	8.3
A02A/450	387188000063	1x15	412	4250	4890	8.8
A02A/500	387188000070	1x18	412	5090	5680	9.9
A02A/600	387188000094	1x21	412	5930	6470	11.6

2-dijelna kombinovana ljestva
II Section combination ladder
Zweiteilige Kombileiter



A09A2/200

3871880000155

2x7

480

1950

3150

2030

3860

9.4

A09A2/250

3871880000162

2x9

480

2480

4270

2590

4910

12.5

A09A2/300

3871880000179

2x11

480

2995

5390

3150

5960

15.4

A09A2/350

3871880000186

2x12

480

3295

5675

3430

6230

16.7

A09A2/400

3871880000193

2x14

480

3870

6795

3990

7280

18.6

A09A2/450

3871880000209

2x15

480

4080

7365

4275

7815

21.5

A09A2/500

3871880001688

2x18

480

4945

8755

5115

9125

25.8

3-dijelna kombinovana ljestva
III section combination ladder
Dreiteilige kombinierleiter

● BLACK EDITION
Powder-coated in black colour




A09A3/200	3871880000216	3x7	480	2047	4090	4930	2850	3890	13.0
A09A3/250	3871880000223	3x9	480	2610	5975	6510	3380	4950	17.6
A09A3/300	3871880000230	3x11	480	3165	7650	8085	3890	6015	22.7
A09A3/350	3871880000247	3x12	480	3430	7910	8330	4195	6250	28.3
A09A3/380	3871880001480	3x13	480	3720	8760	9125	4450	6800	30.5
A09A3/400	3871880000254	3x14	480	4000	9600	9915	4730	7360	32.7
A09A3/450	3871880000261	3x15	480	4275	10430	10695	5000	7900	34.6

2-dijelna istezajuća ljestva
II section extension ladder
Zweiteilige schiebeleiter



Model	Barcode	Sections	Width (mm)	Height (mm)	Length (mm)	Height (mm)	Weight (kg)
A13A2/200	3871880000278	2x7	480	2030	3150	3860	8.5
A13A2/250	3871880000285	2x9	480	2590	4270	4910	11.6
A13A2/300	3871880000292	2x11	480	3150	5390	5960	14.5
A13A2/350	3871880000308	2x12	480	3430	5675	6230	17.2
A13A2/400	3871880000315	2x14	480	3990	6795	7280	18.6
A13A2/450	3871880000322	2x15	480	4275	7365	7815	20.5
A13A2/500	3871880000339	2x16	480	5115	8755	9125	23.5

2-dijelna istezajuća ljestva pomoću užeta
II section extension ladder with rope
Zweiteilige Verlängerungsleiter mit Seil

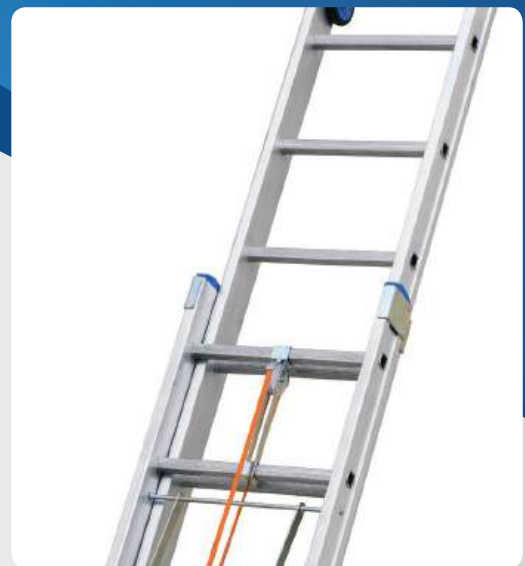


A13AF2/350	3871880000360	2x12	480	3430	5675	6230	17.7
A13AF2/400	3871880000377	2x14	480	3990	6795	7280	19.1
A13AF2/450	3871880000384	2x15	480	4275	7365	7815	21.0
A13AF2/500	3871880000391	2x16	480	5115	8755	9125	24.0

3-dijelna istezajuća ljestva pomoću užeta
III section extension ladder with rope
Dreiteilige Verlängerungsleiter mit Seil



A13AF3/350	387188000506	3x12	480	3535	8010	8430	31.8
A13AF3/400	387188000513	3x14	480	4095	9695	10010	36.8
A13AF3/500	387188000537	3x16	480	4655	10805	11050	42.9

Dupla step ljestva
Double-sided step ladder
Doppelseitig Leitern



Model	Barcode	Steps	Height (mm)	Width (mm)	Height with person (mm)	Height with person (mm)	Weight (kg)
A04ANP/100	3871880000599	2x4	1020	1090	2490	490	5.3
A04ANP/125	3871880000605	2x5	1255	1340	2730	730	6.6
A04ANP/150	3871880000612	2x6	1490	1590	2960	960	7.9
A04ANP/175	3871880000629	2x7	1725	1845	3200	1200	9.3
A04ANP/200	3871880000636	2x8	1950	2090	3435	1435	10.6
A04ANP/225	3871880000643	2x9	2195	2345	3675	1675	12.1
A04ANP/250	3871880000650	2x10	2430	2595	3900	1900	13.5
A04ANP/300	3871880000667	2x12	2900	3095	4370	2370	16.6

Step ljestva
Step ladder
Stehleitern


BLACK EDITION
Powder-coated in black colour



A071A/150	3871880001602	3	1450	730	2530	5.1
A071A/175	3871880001619	4	1700	965	2765	6.0
A071A/200	3871880001626	5	1950	1200	3000	7.1
A071A/225	3871880001633	6	2200	1435	3235	8.0
A071A/250	3871880001640	7	2450	1670	3470	9.1
A071A/275	3871880001657	8	2700	1905	3705	10.2
A071A/325	3871880001664	10	3200	2375	4175	12.2
A071A/375	3871880001671	12	3700	2845	4645	14.4

Skela ALPO
Scaffolding ALPO
Gerüste ALPO

Skela LUXOR
Scaffolding LUXOR
Gerüste LUXOR



A27/530

3871880001763

5300

4300

6300

109.4

A27/720

3871880001770

7200

6200

8200

148.0

A34/10

3871880001787

10000

8800

10800

242.0

A34/12

3871880001794

12000

10800

12800

259.0



EN 131 Certificated by TÜV



STS
aluminium ladders

STS, Pilanska 3
78000 Banja Luka
Bosnia and Herzegovina
Tel. + 387 51 309 982
Tel. + 387 51 355 120
export@maxmaradoo.com
info@maxmaradoo.com
www.stsdoo.com